8” Stainless Steel Submersible Pumps

385 GPM 10SF385 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- **Stainless Steel motor connector.**
- **Stainless Steel pump casing.**
- **Stainless steel pump shaft, coupling & wire guard.**
- **Stainless steel discharge with built-in non-return valve.**
- **High quality shaft bearings.**

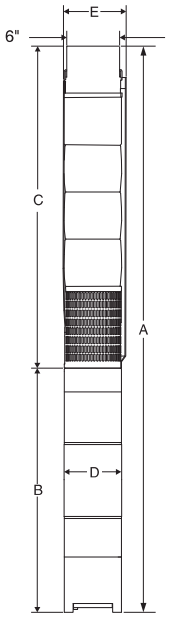

Fig. A

MODEL NUMBER	FIG	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					SHIP. WT. (Motor & Pump End)
					A	B	C	D	E	
8SF385SS75-1-6	A	7.5	6"	5" NPT	52.2	27.9	24.3	5.6	7.0	159
8SF385SS100-2-6	A	10	6"	5" NPT	59.2	29.8	29.4	5.6	7.0	186
8SF385SS150-2-6	A	15	6"	5" NPT	63.4	34.0	29.4	5.6	7.0	211
8SF385SS200-3-6	A	20	6"	5" NPT	72.3	37.9	34.4	5.6	7.0	242
8SF385SS250-3-6	A	25	6"	5" NPT	74.7	40.3	34.4	5.6	7.0	282
8SF385SS250-4-6	A	25	6"	5" NPT	79.8	40.3	39.5	5.6	7.0	291
8SF385SS300-4-6	A	30	6"	5" NPT	82.1	42.6	39.5	5.6	7.0	308
8SF385SS300-5-6	A	30	6"	5" NPT	87.1	42.6	44.5	5.6	7.0	318
8SF385SS400-5-6*	A	40	6"	5" NPT	92.3	47.8	44.5	5.6	7.0	356
8SF385SS400-6-6	A	40	6"	5" NPT	97.4	47.8	49.6	5.6	7.0	365
8SF385SS500-6-6*	A	50	6"	5" NPT	101.3	51.7	49.6	5.6	7.0	387
8SF385SS500-7-6	A	50	6"	5" NPT	106.9	51.7	55.2	5.6	7.0	396
8SF385SS600-7-6*	A	60	6"	5" NPT	110.8	55.6	55.2	5.6	7.0	418
8SF385SS600-8-6*	A	60	6"	5" NPT	115.8	55.6	60.2	5.6	7.0	428
8SF385SS750-9	A	75	8"	5" NPT	119.9	54.6	65.3	7.5	7.9	687
8SF385SS750-10	A	75	8"	5" NPT	124.9	54.6	70.3	7.5	7.9	696
8SF385SS1000-11	A	100	8"	5" NPT	138.4	63.0	75.4	7.5	7.9	836
8SF385SS1000-12	A	100	8"	5" NPT	143.4	63.0	80.4	7.5	7.9	846
8SF385SS1000-13	A	100	8"	5" NPT	148.4	63.0	85.4	7.5	7.9	856

* Alternate motor sizes available

MATERIAL SPECIFICATIONS

Valve Housing	304 Stainless steel	Intermediated Bearings	NBR
Check Valve	304 Stainless steel	Impeller Seal Ring	NBR
Diffuser Chamber	304 Stainless Steel	Check Valve Seat	NBR/304 Stainless Steel
Split Cone Nut	304 Stainless Steel	Top Bearing	NBR/304 Stainless Steel
Split Cone	304 Stainless steel	Upthrust Disc	Carbon/Graphite
Impeller	304 Stainless steel	Check Valve Spring	304 Stainless Steel
Suction Interconnector	304 Stainless Steel	O-ring	NBR
Inlet Screen	304 Stainless steel	Valve Seat	NBR
Straps	304 Stainless Steel	Lower Valve Seat Retainer	304 Stainless Steel
Cable Guard	304 Stainless Steel	Upper Valve Seat Retainer	304 Stainless Steel
Coupling	316 Stainless Steel	Valve Guide	304 Stainless steel
Pump Shaft	431 Stainless steel		

NOTES: Specifications subject to change without notice.

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417

8” Stainless Steel Submersible Pumps

385 GPM 10SF385 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- Stainless Steel motor connector.
- Stainless Steel pump casing.
- Stainless steel pump shaft, coupling & wire guard.
- Stainless steel discharge with built-in non-return valve.
- High quality shaft bearings.

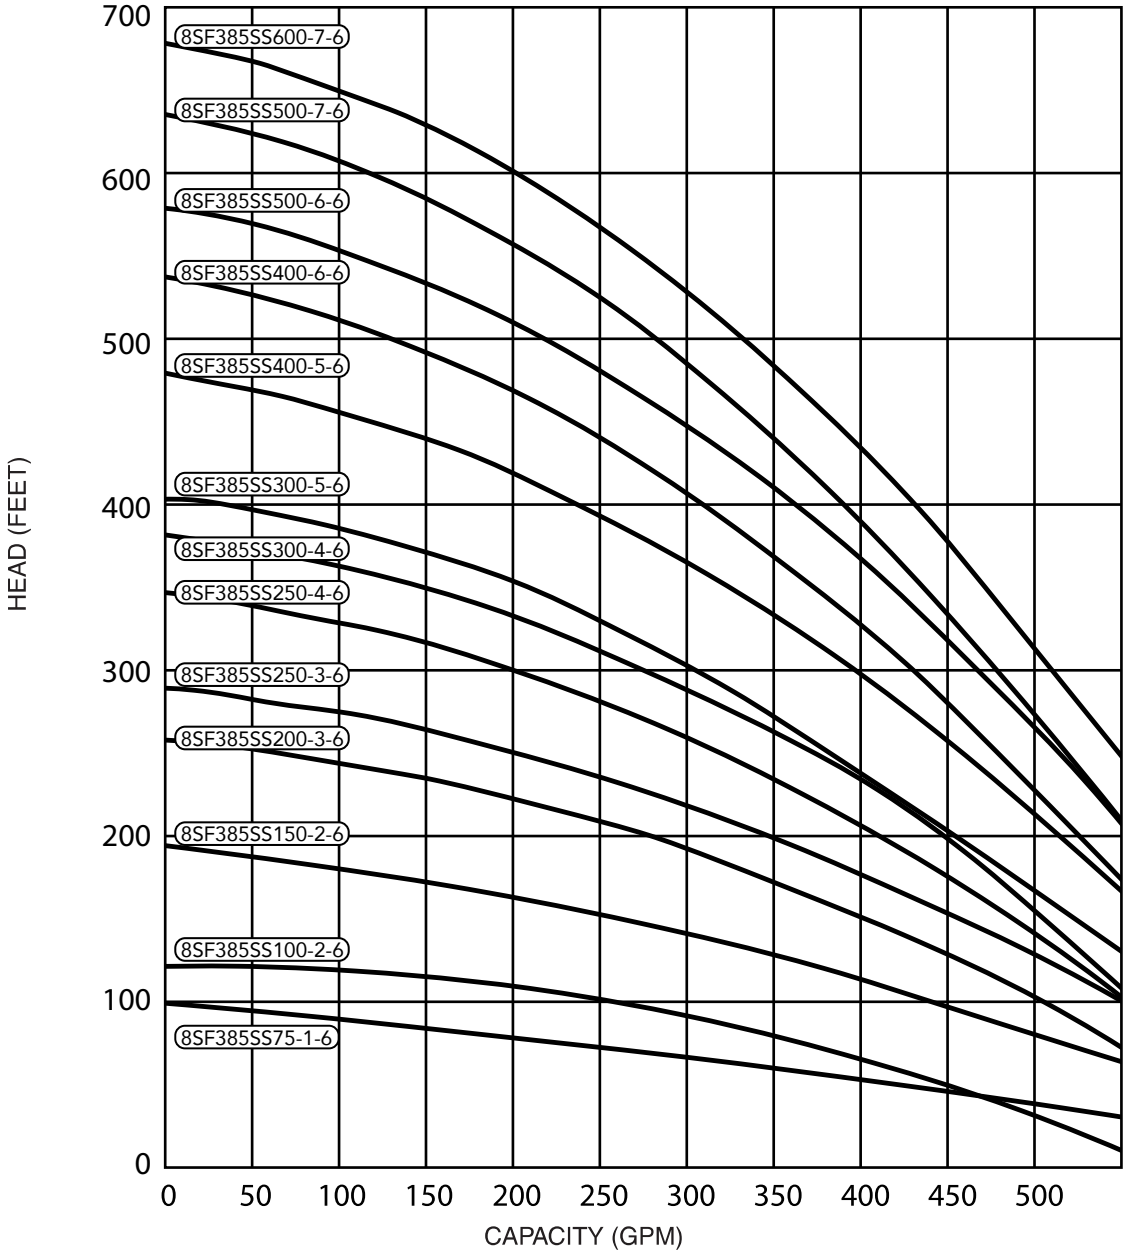

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417

8” Stainless Steel Submersible Pumps

385 GPM 10SF385 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- Stainless Steel motor connector.
- Stainless Steel pump casing.
- Stainless steel pump shaft, coupling & wire guard.
- Stainless steel discharge with built-in non-return valve.
- High quality shaft bearings.

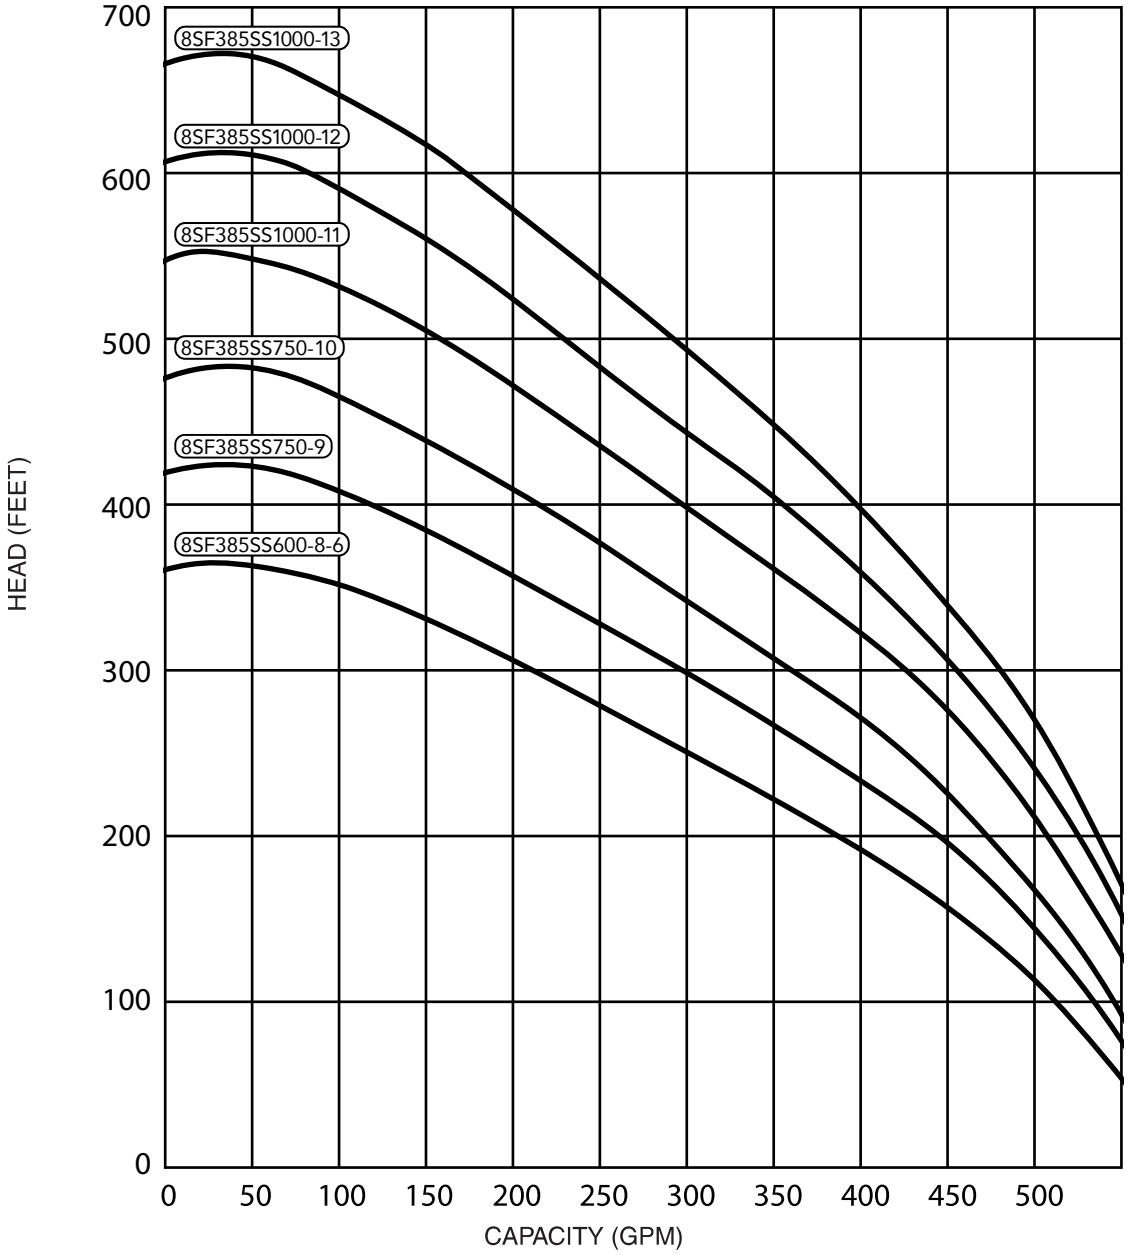

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417

8” Stainless Steel Submersible Pumps

475 GPM 10SF475 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- Stainless Steel motor connector.
- Stainless Steel pump casing.
- Stainless steel pump shaft, coupling & wire guard.
- Stainless steel discharge with built-in non-return valve.
- High quality shaft bearings.

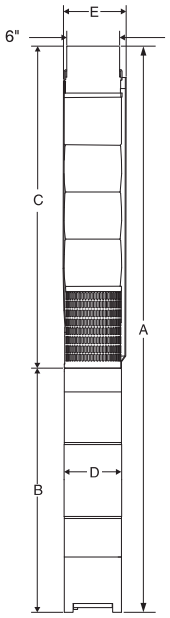

Fig. A

MODEL NUMBER	FIG	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					SHIP. WT. (Motor & Pump End)
					A	B	C	D	E	
8SF475SS75-1-6	A	7.5	6"	5" NPT	52.2	27.9	24.3	5.6	7.0	159
8SF475SS100-1-6	A	10	6"	5" NPT	54.1	29.8	24.3	5.6	7.0	176
8SF475SS150-2-6	A	15	6"	5" NPT	63.4	34.0	29.4	5.6	7.0	211
8SF475SS200-2-6	A	20	6"	5" NPT	67.3	37.9	29.4	5.6	7.0	235
8SF475SS250-3-6	A	25	6"	5" NPT	74.7	40.3	34.4	5.6	7.0	282
8SF475SS300-4A-6	A	30	6"	5" NPT	77.0	42.6	34.4	5.6	7.0	299
8SF475SS300-4-6	A	30	6"	5" NPT	82.1	42.0	39.5	5.6	7.0	308
8SF475SS400-4-6*	A	40	6"	5" NPT	87.3	47.8	39.5	5.6	7.0	346
8SF475SS400-5-6*	A	40	6"	5" NPT	92.3	47.8	44.5	5.6	7.0	355
8SF475SS500-5-6*	A	50	6"	5" NPT	96.2	51.7	44.5	5.6	7.0	377
8SF475SS500-6-6*	A	50	6"	5" NPT	101.8	51.7	50.1	5.6	7.0	388
8SF475SS600-6-6*	A	60	6"	5" NPT	105.7	55.6	50.1	5.6	7.0	410
8SF475SS600-7-6*	A	60	6"	5" NPT	110.8	55.6	55.2	5.6	7.0	418
8SF475SS750-8	A	75	8"	5" NPT	114.8	54.6	60.2	7.5	7.9	77
8SF475SS1000-9	A	100	8"	5" NPT	128.2	63.0	65.2	7.5	7.9	819
8SF475SS1000-10	A	100	8"	5" NPT	133.3	63.0	70.3	7.5	7.9	828
8SF475SS1000-11	A	100	8"	5" NPT	138.4	63.0	75.4	7.5	7.9	836
8SF475SS1250-12	A	125	8"	5" NPT	148.1	67.7	80.4	7.5	7.9	895
8SF475SS1250-13	A	125	8"	5" NPT	153.2	67.7	85.5	7.5	7.9	906

* Alternate motor sizes available

MATERIAL SPECIFICATIONS

Valve Housing	304 Stainless steel	Intermediated Bearings	NBR
Check Valve	304 Stainless steel	Impeller Seal Ring	NBR
Diffuser Chamber	304 Stainless Steel	Check Valve Seat	NBR/304 Stainless Steel
Split Cone Nut	304 Stainless Steel	Top Bearing	NBR/304 Stainless Steel
Split Cone	304 Stainless steel	Upthrust Disc	Carbon/Graphite
Impeller	304 Stainless steel	Check Valve Spring	304 Stainless Steel
Suction Interconnector	304 Stainless Steel	O-ring	NBR
Inlet Screen	304 Stainless steel	Valve Seat	NBR
Straps	304 Stainless Steel	Lower Valve Seat Retainer	304 Stainless Steel
Cable Guard	304 Stainless Steel	Upper Valve Seat Retainer	304 Stainless Steel
Coupling	316 Stainless Steel	Valve Guide	304 Stainless steel
Pump Shaft	431 Stainless steel		

NOTES: Specifications subject to change without notice.

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417

8” Stainless Steel Submersible Pumps

475 GPM 10SF475 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- Stainless Steel motor connector.
- Stainless Steel pump casing.
- Stainless steel pump shaft, coupling & wire guard.
- Stainless steel discharge with built-in non-return valve.
- High quality shaft bearings.

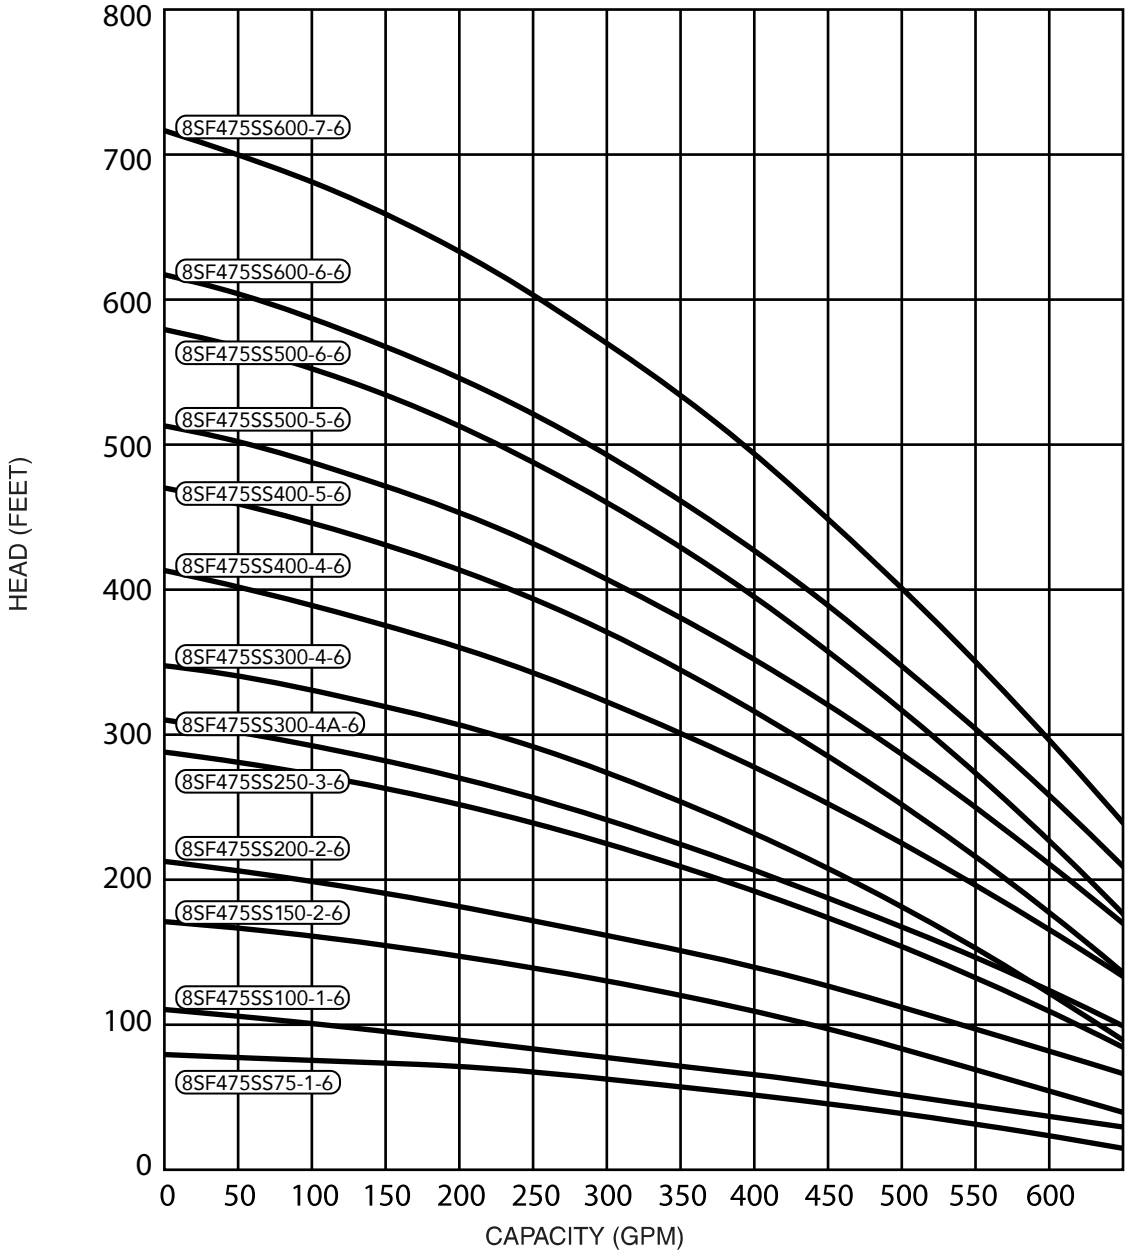

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417

8” Stainless Steel Submersible Pumps

475 GPM 10SF475 Specifications

Strom Professional Series 6” all Stainless Pumps for deep well applications
Exceptional reliability and superior sand handling performance.

Features:

- Stainless Steel motor connector.
- Stainless Steel pump casing.
- Stainless steel pump shaft, coupling & wire guard.
- Stainless steel discharge with built-in non-return valve.
- High quality shaft bearings.

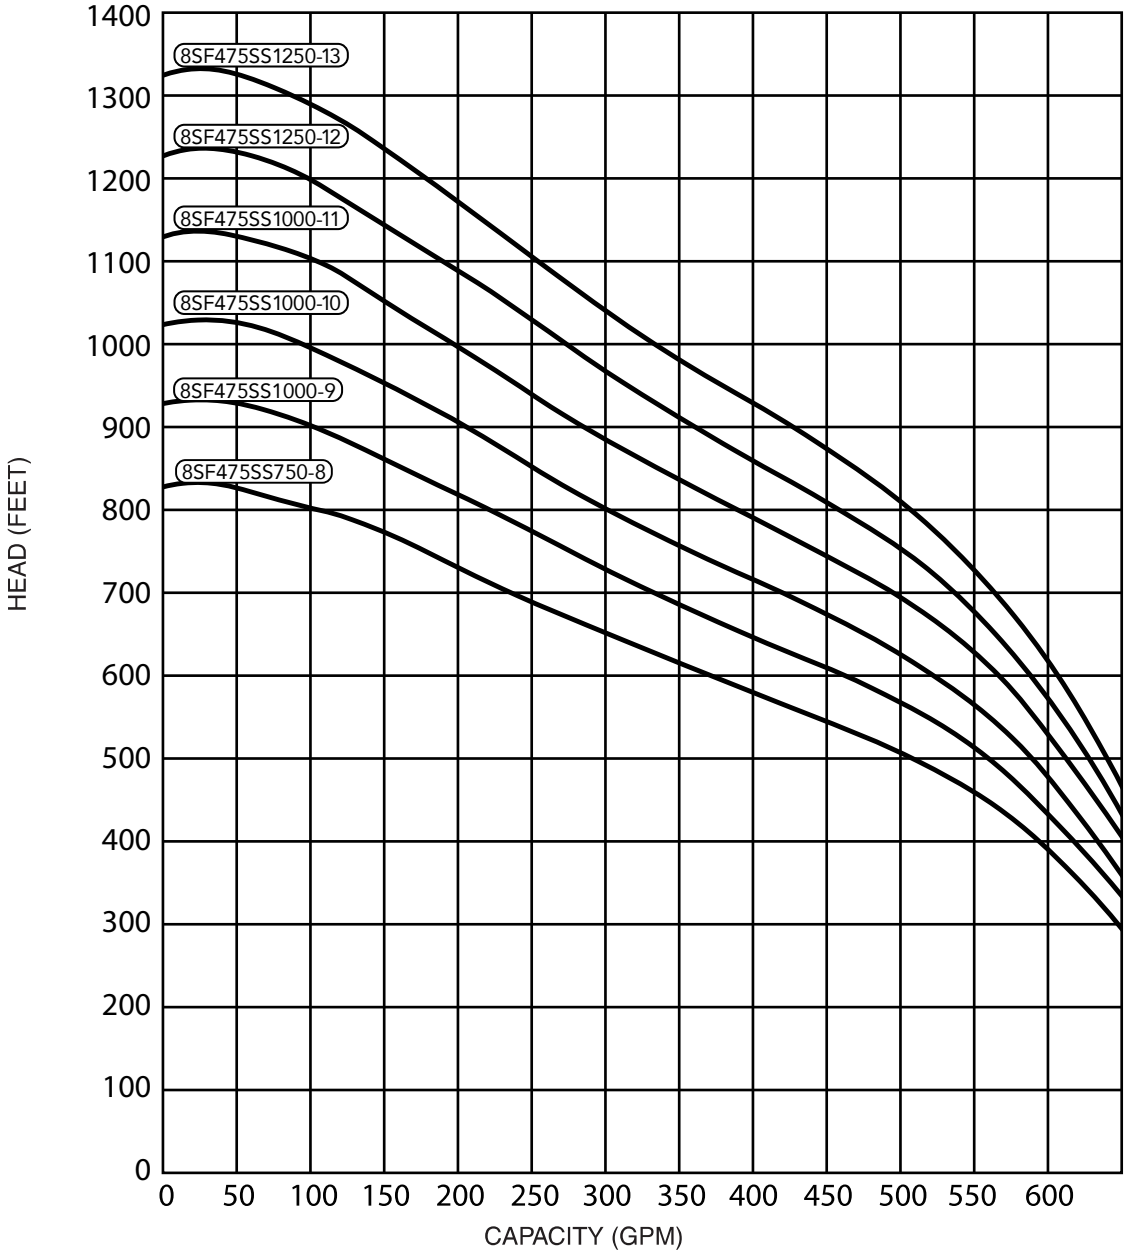

Swiss Pacific, Inc. • 4160 Weaver Court South • Hilliard, Ohio • 43026
800-770-3860
www.SwissPacific.com

rev.071417